

ECO friendly



7600 Forest

Our 76mm system with 6-chamber uPVC profiles is crafted for clients seeking a blend of modern elegance, practicality, and functionality. It ensures exceptional comfort and greatly enhances the quality of life for its users.



6 chambers

Featuring six-chamber technology, this system is engineered for superior thermal and sound insulation.



3 gaskets

Three levels of ventilation ensure excellent windproofing, optimal wind protection, and superior sound insulation.



Triple glass

Available with double glass of 24mm and 28mm, three-layer 36mm glass and triple 44mm glazing bead.



76mm width

Our 76mm width uPVC profile offers exceptional durability, energy efficiency, and a sleek design.




Quality and certified



Standard colors of our uPVC profiles

All other colors can be made to order



White



Anthracite



Golden Oak



Dark Oak



Nussbaum



Jet Black



Mahogany

Why to choose our products?

Our PVC window and door systems are manufactured using advanced technology and provide an excellent level of acoustic and thermal insulation, achieving the highest quality standards available.



Environment
Friendly



Easy
Installation



Cost
Effective



Noise
Reduction



Can be
recycled



Less
Maintenance



Fire
Retardant



Long
life



Thermal
Insulation



Modern
design



Premium uPVC profiles

Created from high-quality raw materials



Innovation

Enhanced durability and energy efficiency for construction needs



Reliability


Our uPVC profiles are designed for unmatched reliability




Scan code and read more informations about this uPVC profile series.




BF 7601
Frame profile
(MD)

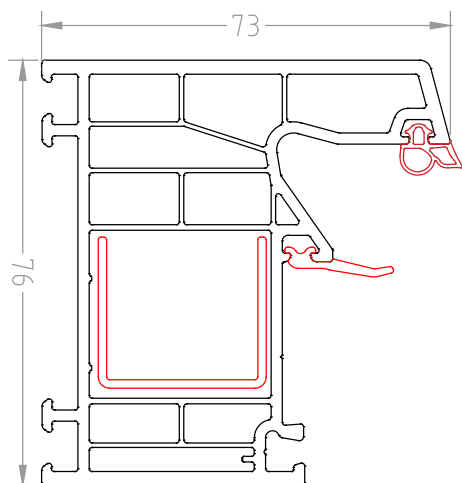


BF 7611
Frame profile
(AD)

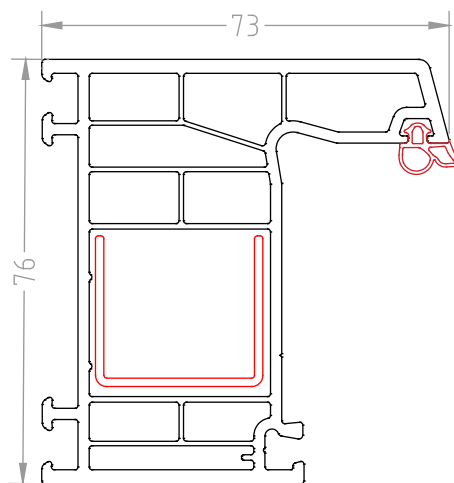


BF 7602
Window sash profile

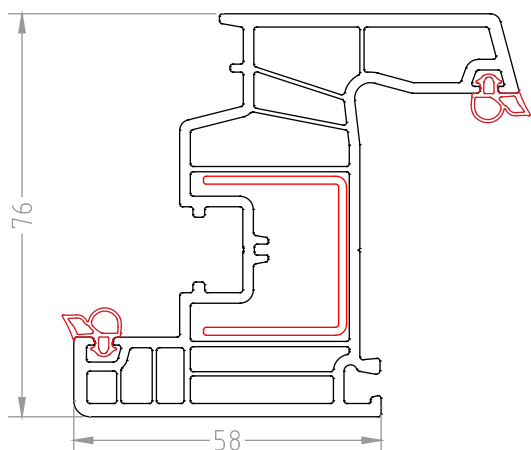


BF 7603
In turn door sash profile

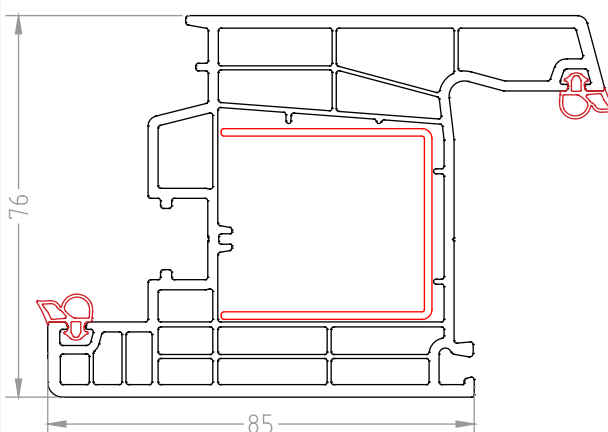


BF 7604
Outward opening door sash profile

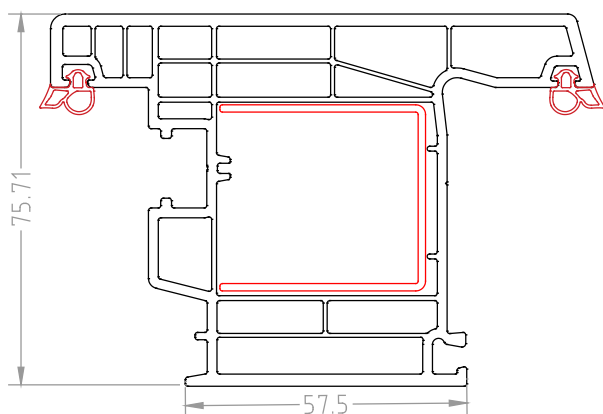


BF 7605
Mullion (T-bar) profile
(MD)

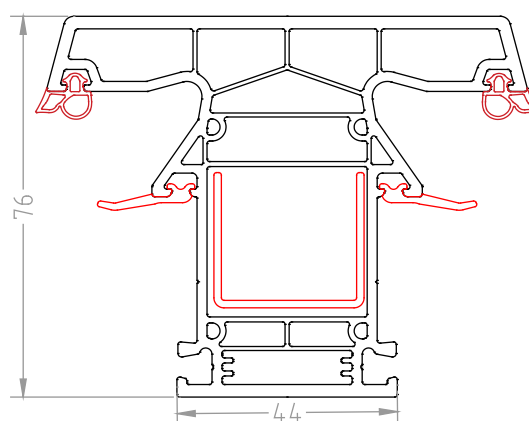


BF 7612
Frame profile with cornice

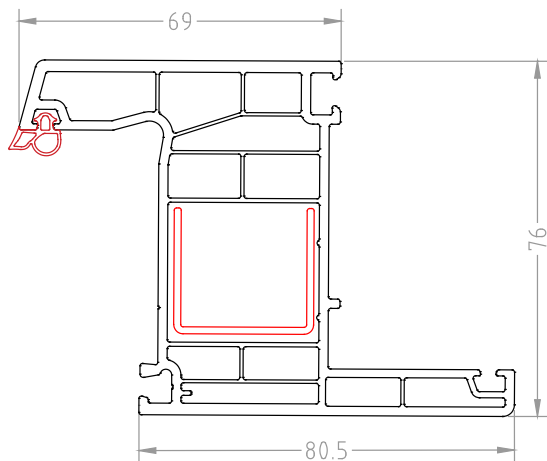


BF 7615
Mullion (T-bar) profile
(AD)

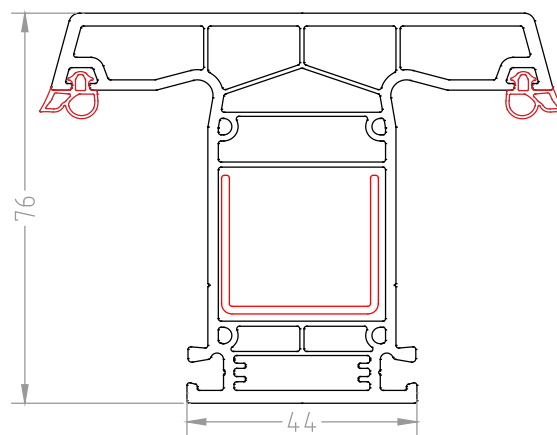


BF 7606
False mullion profile
(MD)

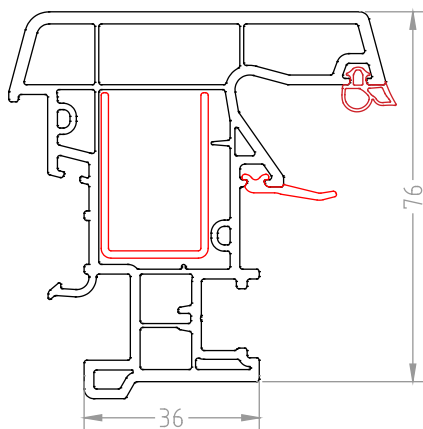


BF 7616
False mullion profile
(AD)

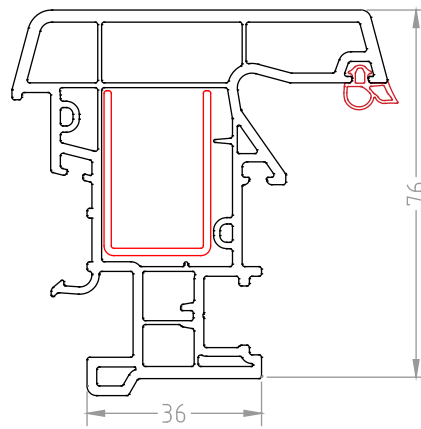


BF 85-76
85-76 Combination frame

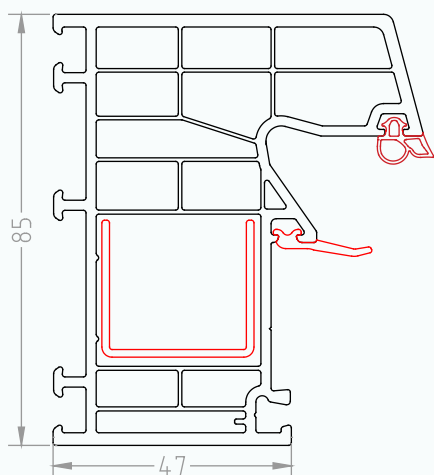


BF 76-84
Mullion (T-bar) profile combination

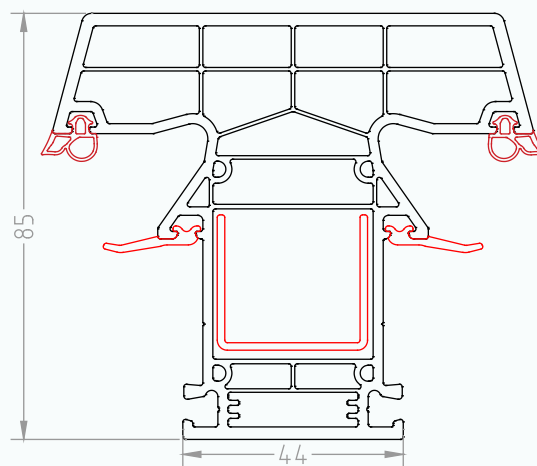


BF 7609
Double glazing bead
24 mm

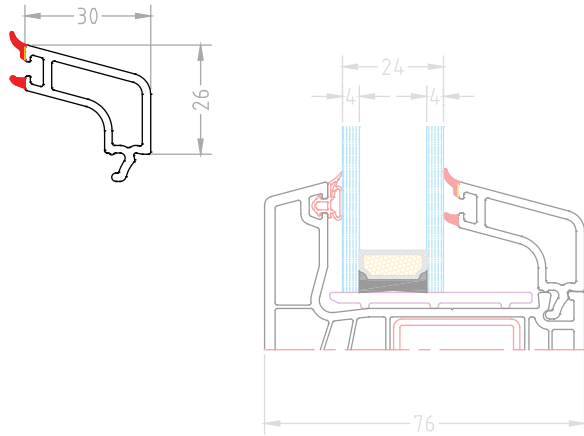


BF 8508
Double glazing bead
28 mm

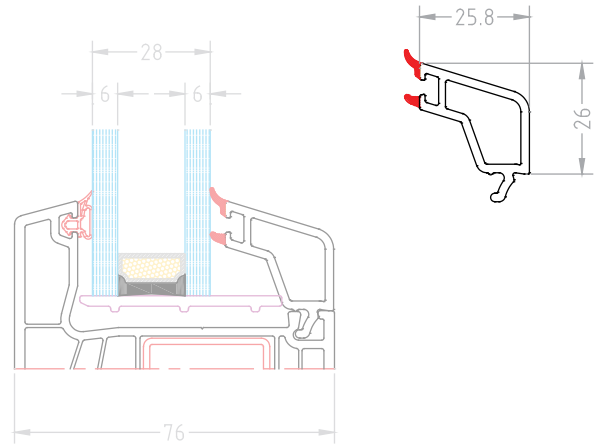

BF 8510
Triple glazing bead
36 mm

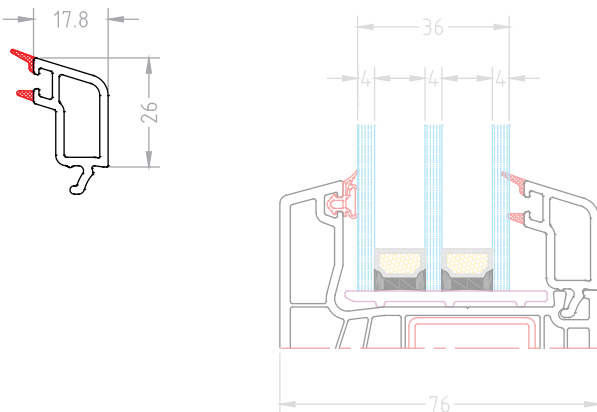

BF 7054
Triple glazing bead
44 mm

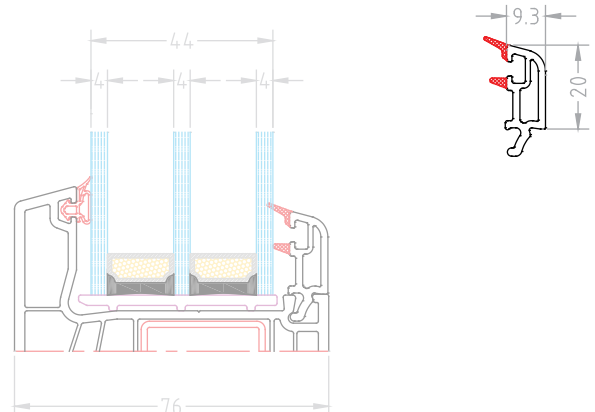

Glazing Beads for uPVC Windows and Doors


Glazing beads are crucial components in uPVC windows and doors, ensuring the glass panes are securely held in place while providing a neat and finished appearance. These beads are typically made from the same uPVC material as the window or door frames, ensuring a seamless and cohesive look.

Durability
Low Maintenance
Energy Efficiency

Iron reinforcement

Can be used for:

BF 7601 Frame profile
BF 7611 Frame profile
BF 7602 Sash profile
BF 7612 Cornice frame profile,
BF 7605 and **BF 7615** Mullion
(T-bar) profile, **BF 85-76**
Frame combination and
BF 76-84 Mullion (T-Bar)
combination

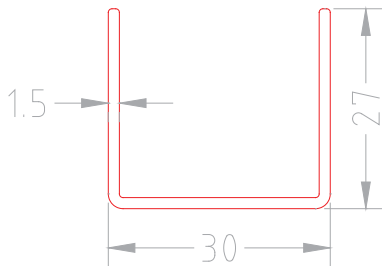


BF 409-12 (Thickness 1.2mm) **BF 409-15** (Thickness 1.5mm) **BF 409-20** (Thickness 2.0mm)

Iron reinforcement

Can be used for: **BF 7603**

Door sash and **BF 7604**
Outward door sash

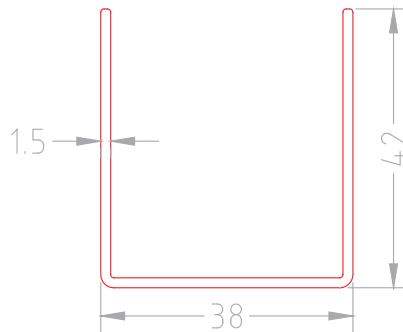


BF 410-12 (Thickness 1.2mm) **BF 410-15** (Thickness 1.5mm) **BF 410-20** (Thickness 2.0mm)

Iron reinforcement

Can be used for:

BF 7616 False mullion profile




BF 411-12 (Thickness 1.2mm) **BF 411-15** (Thickness 1.5mm) **BF 411-20** (Thickness 2.0mm)

Iron reinforcement

Can be used for:

BF 7610 Profile extension
100mm

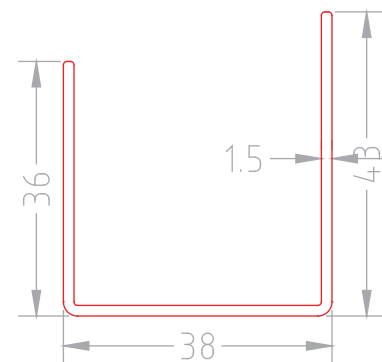


BF 412-12 (Thickness 1.2mm) **BF 412-15** (Thickness 1.5mm) **BF 412-20** (Thickness 2.0mm)

Iron reinforcement

Can be used for:

BF 7625 Profile extension
25mm

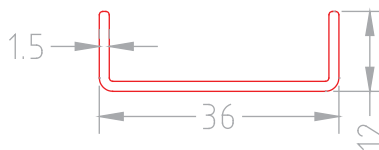


BF 408-12 (Thickness 1.2mm) **BF 408-15** (Thickness 1.5mm) **BF 408-20** (Thickness 2.0mm)

Iron reinforcement

Can be used for:

BF 7601 and **BF 7611** Frame,
BF 7602 Sash, **BF 7612**
Cornice frame profile,
BF 7605 and **BF 7615** Mullion
(T-bar) profile, **BF 85-76**
Frame combination and
BF 76-84 Mullion (T-Bar)
combination

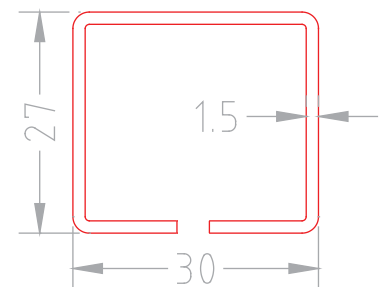

Squared reinforcement


BF 413-12 (Thickness 1.2mm) **BF 413-15** (Thickness 1.5mm) **BF 413-20** (Thickness 2.0mm)

7600 Forest


6 chamber uPVC profiles

Additional profiles


BF 7610
Profile extension
76*100mm

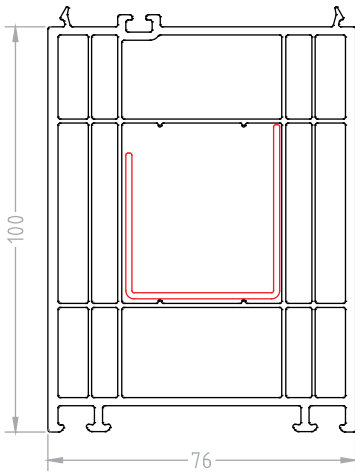


BF 7625
Profile extension
76*25mm




BF 7617
Treshold




BF 8535
Connecting pillar




BF 5025
Additional cornice
part - Adaptor



BF 8536
Window Drainboard



BF 7208
Blind box extension




BF 7618
Treshold cap 76




BF 7619
False mullion cap 76



BF 7202
Connecting molding



OB 0076
Mullion (T-bar) coupling 76




OB 0077
Mullion (T-bar) coupling 76




DOOR SYSTEM

Application
of frame and
door sash

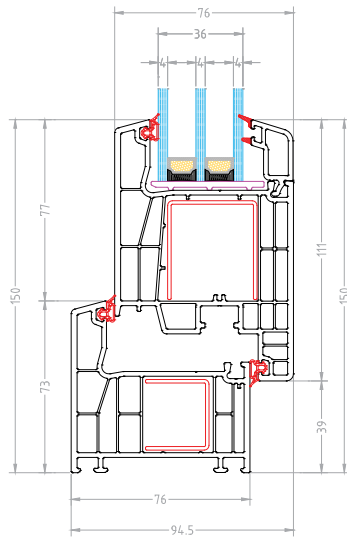


WINDOW SYSTEM

Application
of frame and
window sash

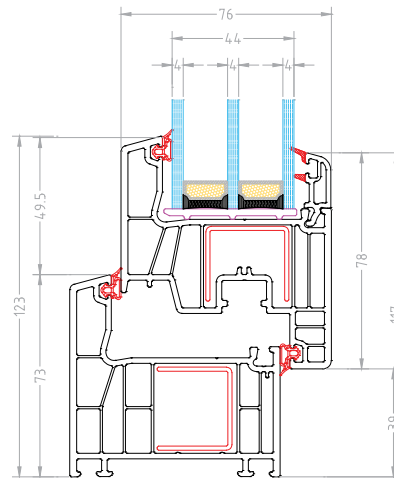


DOOR SYSTEM

Application
of frame and
outward
opening
door
sash

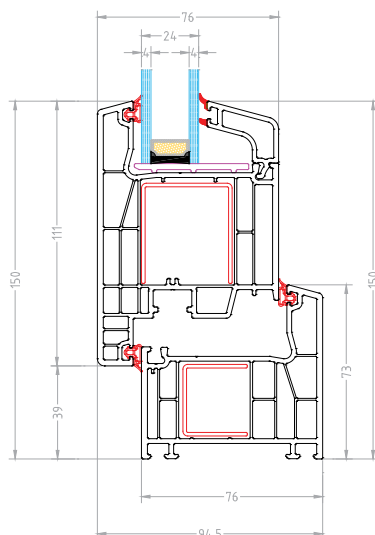


WINDOW SYSTEM

Application
of sash and
false mullion
profile

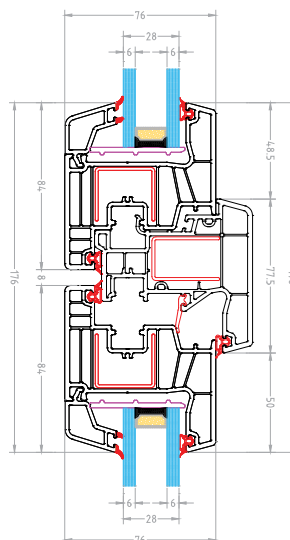


WINDOW SYSTEM

Application
of sash and
Mullion (T-bar)
profile

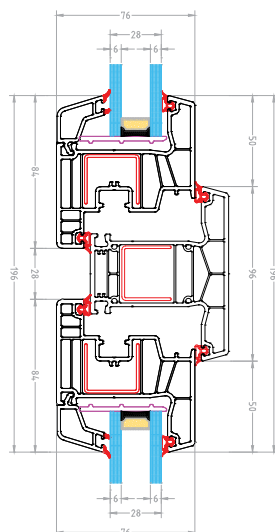


WINDOW SYSTEM

Application
of corner profile

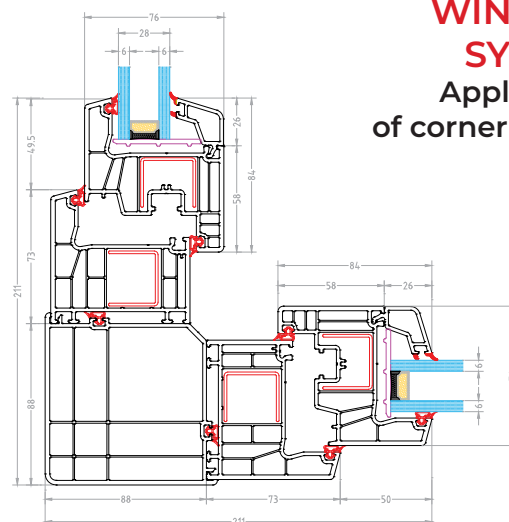


DOOR SYSTEM

Application of frame extension 25mm

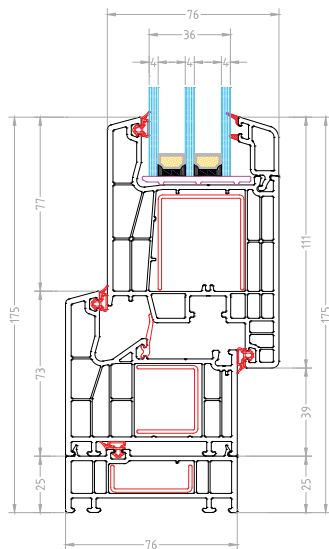


DOOR SYSTEM

Application of frame extension 100mm

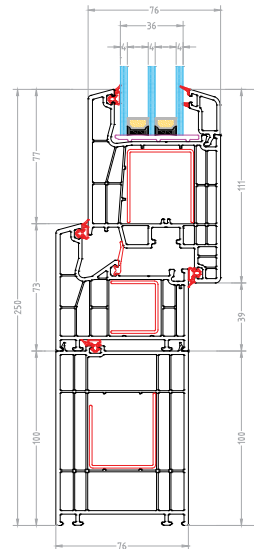


DOOR SYSTEM

Application of 24mm door panel

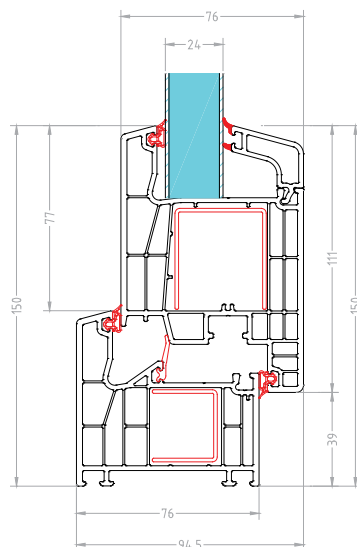


DOOR SYSTEM

Application of 36mm door panel

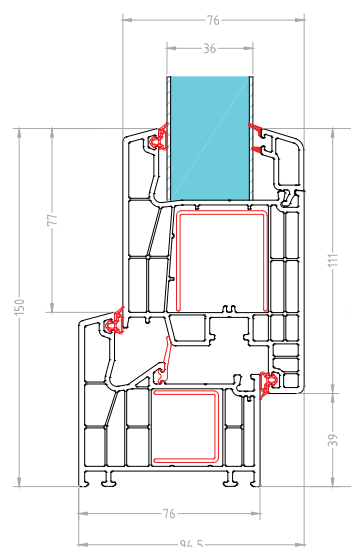


WINDOW SYSTEM

Application of cornice frame profile

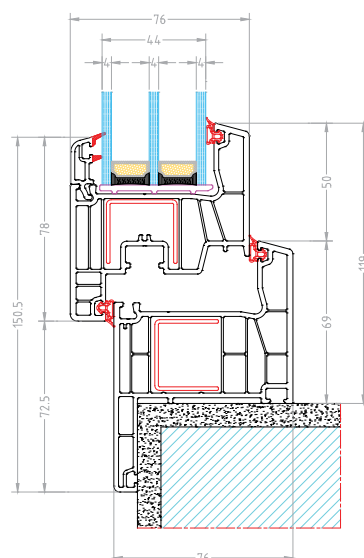

WINDOW SYSTEM


Application of connection molding

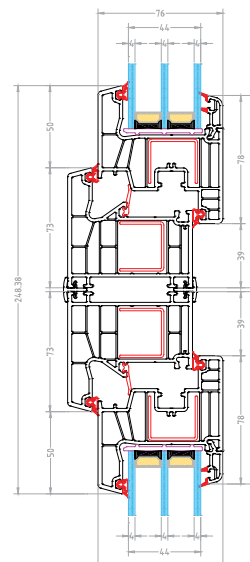

WINDOW SYSTEM


Application of additional cornice part on the wall

Used 85-76 Combination frame

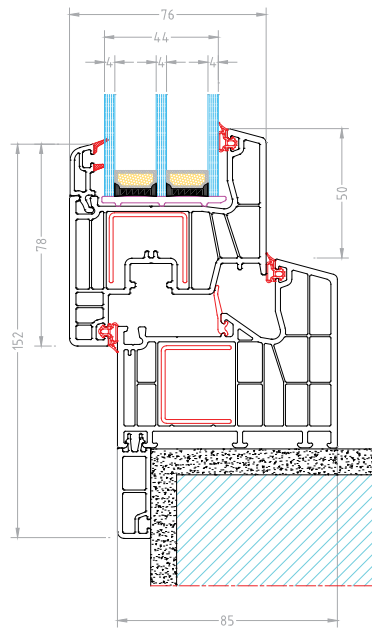

WINDOW SYSTEM

Drainage view

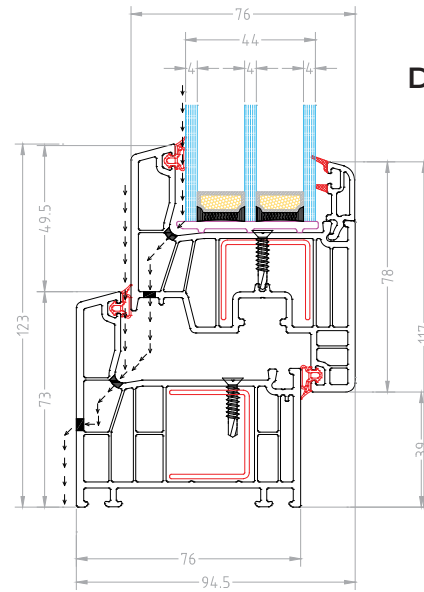

WINDOW SYSTEM

Application of outside ALU window sill and inside PVC window sill

