

 **Premium**



8500 Supremo

The A-Class 8500 system is designed for clients who desire a combination of contemporary elegance, practicality, and functionality. It guarantees top-tier comfort and significantly improves the quality of life for all its users.



7 chambers

Featuring seven-chamber technology, this system is engineered for superior thermal and sound insulation.



3 gaskets

Three levels of ventilation ensure excellent windproofing, optimal wind protection, and superior sound insulation.



Triple glass

Available with double glass of 24mm, three-layer 36mm glass and triple 44mm glazing bead.



85mm width

Our 85mm width uPVC profile offers exceptional durability, energy efficiency, and a sleek design.



Quality and certified



Standard colors of our uPVC profiles

All other colors can be made to order



White



Anthracite



Golden Oak



Dark Oak



Nussbaum



Jet Black



Mahogany

Why to choose our products?

Our PVC window and door systems are manufactured using advanced technology and provide an excellent level of acoustic and thermal insulation, achieving the highest quality standards available.



Environment
Friendly



Easy
Installation



Cost
Effective



Noise
Reduction



Can be
recycled



Less
Maintenance



Fire
Retardant



Long
life



Thermal
Insulation



Modern
design



Premium uPVC profiles

Created from high-quality raw materials



Innovation

Enhanced durability and energy efficiency for construction needs



Reliability


Our uPVC profiles are designed for unmatched reliability




Scan code and read more informations about this uPVC profile series.




BF 8581
Frame profile

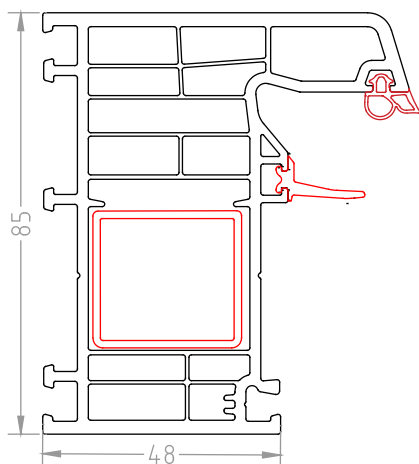


BF 8582
Sash profile

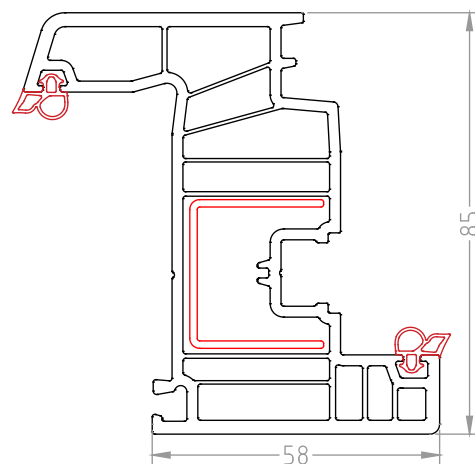


BF 8583
In turn door sash profile

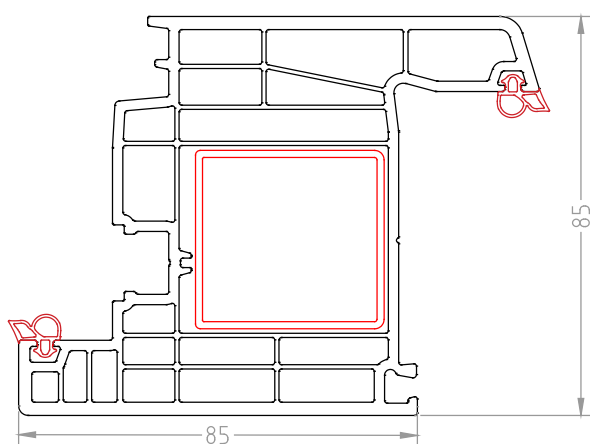


BF 8584
Outward opening door sash profile

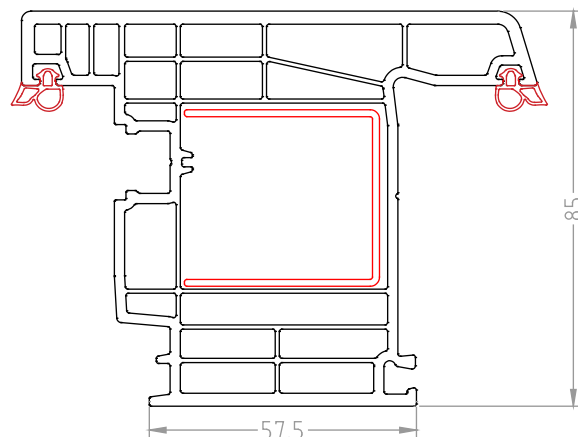


BF 8545
Renovation frame
Frame with cornice

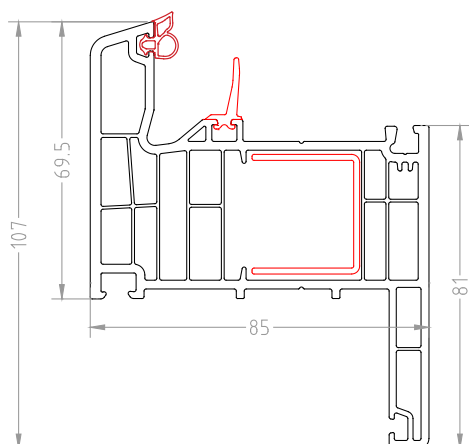


BF 8585
Mullion (T-bar) profile

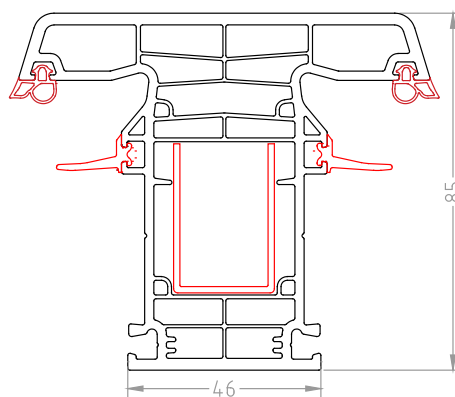


BF 8586
False mullion profile

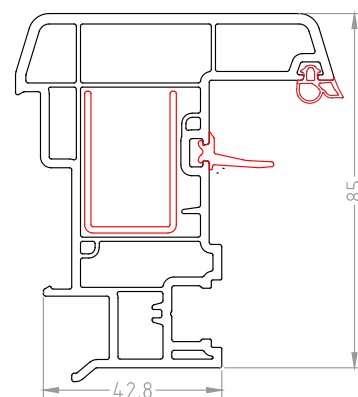


BF 8509
Double glazing bead
24 mm

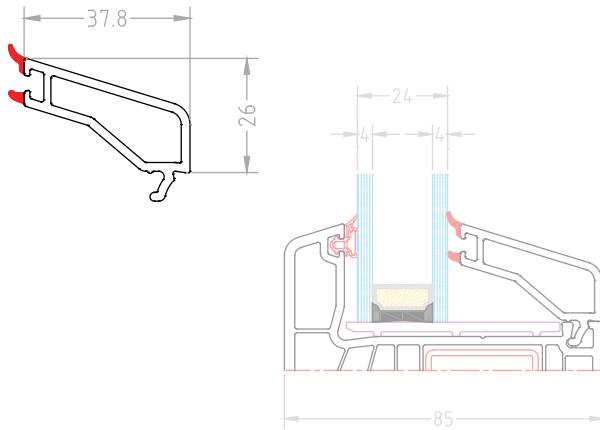


BF 7609
Triple glazing bead
32 mm

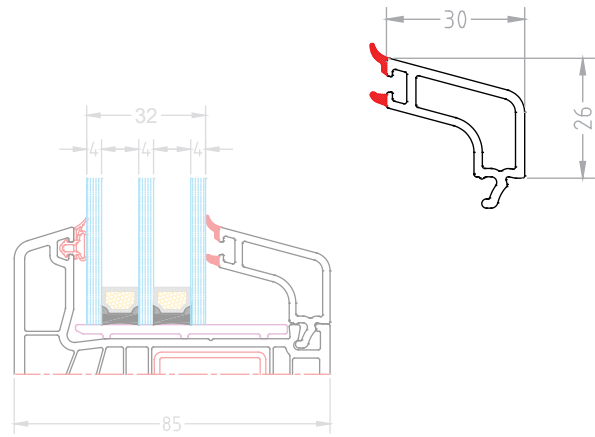


BF 8508
Triple glazing bead
36 mm

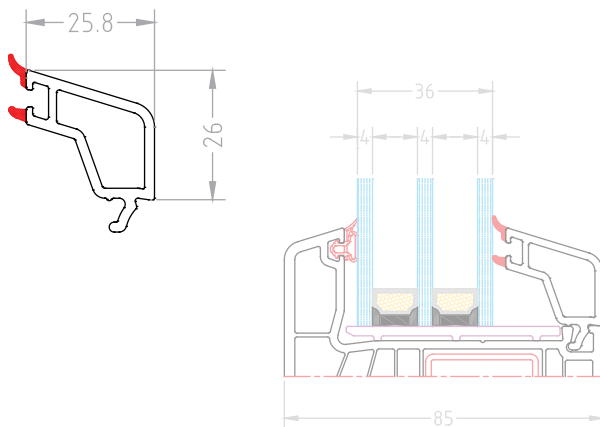

BF 8510
Triple glazing bead
44 mm

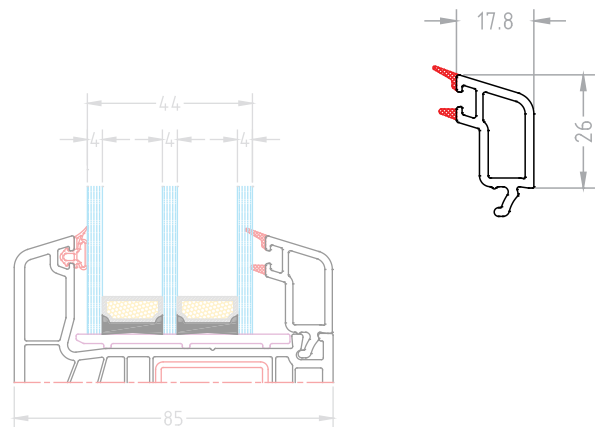

BF 7054
Triple glazing bead
52.50 mm

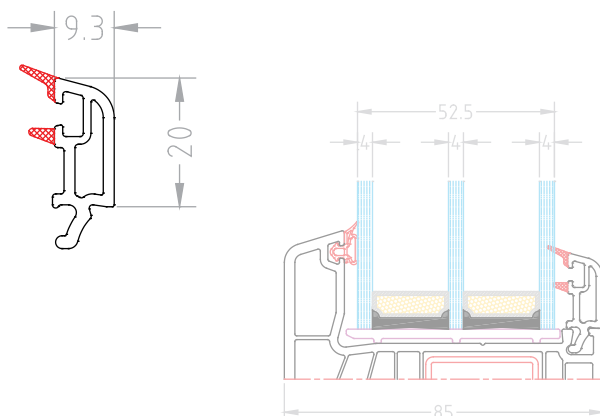

Glazing Beads for uPVC Windows and Doors


Glazing beads are crucial components in uPVC windows and doors, ensuring the glass panes are securely held in place while providing a neat and finished appearance. These beads are typically made from the same uPVC material as the window or door frames, ensuring a seamless and cohesive look.

Durability
Low Maintenance
Energy Efficiency

Iron reinforcement

Can be used for:

BF 8501, BF 8521 and BF 8581 Frame, **BF 8502, BF 8522 and BF 8582** Sash, and **BF 8545** Frame with cornice

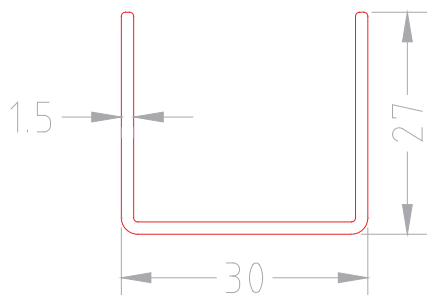


BF 409-12 (Thickness 1.2mm) **BF 409-15** (Thickness 1.5mm) **BF 409-20** (Thickness 2.0mm)

Iron reinforcement

Can be used for:

BF 8503, BF 8504, BF 8523, BF 8583 and **BF 8584** Door sash

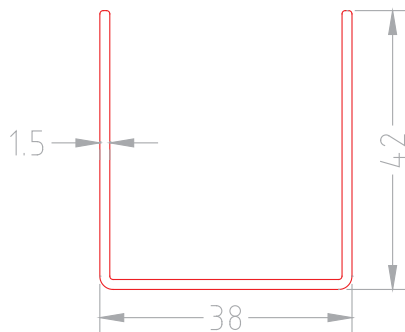


BF 410-12 (Thickness 1.2mm) **BF 410-15** (Thickness 1.5mm) **BF 410-20** (Thickness 2.0mm)

Iron reinforcement

Can be used for:

BF 8506, BF 8526 and BF 8586 False mullion profile

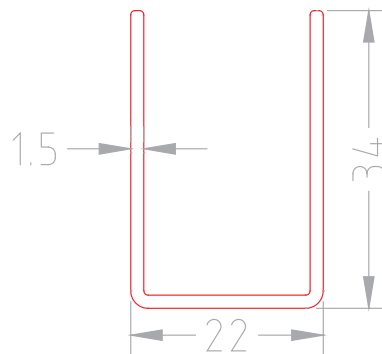


BF 411-12 (Thickness 1.2mm) **BF 411-15** (Thickness 1.5mm) **BF 411-20** (Thickness 2.0mm)

Iron reinforcement

Can be used for:

BF 8505, BF 8525 and BF 8585 Mullion (T-bar) profile

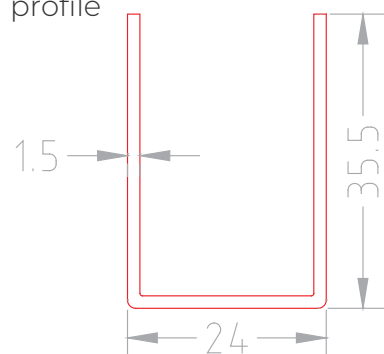


BF 414-12 (Thickness 1.2mm) **BF 414-15** (Thickness 1.5mm) **BF 414-20** (Thickness 2.0mm)

Iron reinforcement

Can be used for:

BF 8520 Profile extension 100mm

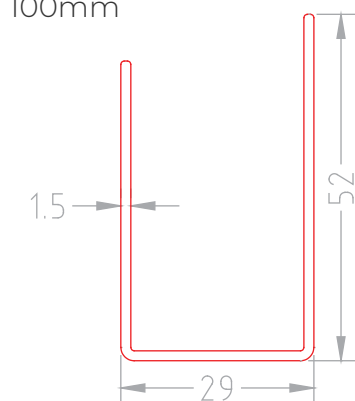


BF 407-12 (Thickness 1.2mm) **BF 407-15** (Thickness 1.5mm) **BF 407-20** (Thickness 2.0mm)

Iron reinforcement

Can be used for:

BF 8507 Profile extension 25mm

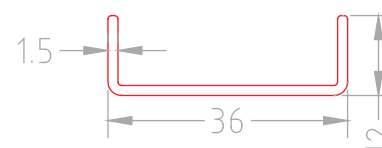


BF 408-12 (Thickness 1.2mm) **BF 408-15** (Thickness 1.5mm) **BF 408-20** (Thickness 2.0mm)

Iron reinforcement

Can be used for:

BF 8505, BF 8525 and BF 8585 Mullion (T-bar) profile




BF 415-12 (Thickness 1.2mm) **BF 415-15** (Thickness 1.5mm) **BF 415-20** (Thickness 2.0mm)

Iron reinforcement

Can be used for:

BF 8501, BF 8521 and BF 8581 Frame, **BF 8502, BF 8522 and BF 8582** Sash, and **BF 8545** Frame with cornice

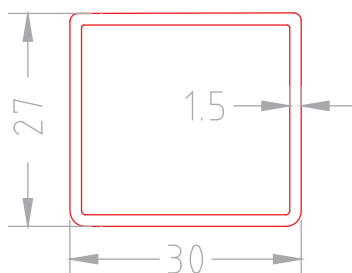


BF 413-12 (Thickness 1.2mm) **BF 413-15** (Thickness 1.5mm) **BF 413-20** (Thickness 2.0mm)

Iron reinforcement


Can be used for:

BF 8504, BF 8523, BF 8583 and **BF 8584** Door sash

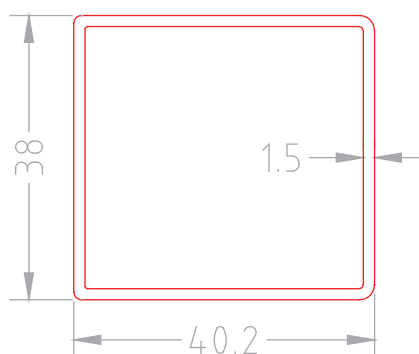


BF 416-12 (Thickness 1.2mm) **BF 416-15** (Thickness 1.5mm) **BF 416-20** (Thickness 2.0mm)


BF 8520
Profile extension
85*100mm




BF 8507
Profile extension
85*25mm




BF 8535
Connecting pillar




BF 8517
Treshold




BF 5025
Additional cornice
part - Adaptor




BF 8536
Window Drainboard



BF 7208
Blind box extension



BF 8588
Corner Connector
Chocks




BF 8518
Treshold cap 85




BF 8589
False mullion cap




OKBT 85
Mullion (T-bar)
coupling 85




BF 8531
Angle connection pipe



BF 8542
Pipe adaptor




BF 7202
Connecting molding




DOOR SYSTEM

Application of frame extension 25mm

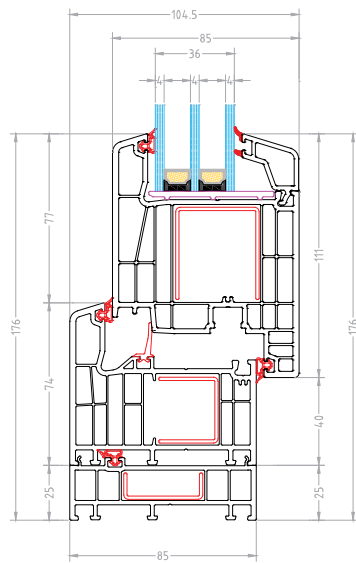


DOOR SYSTEM

Application of frame extension 100mm

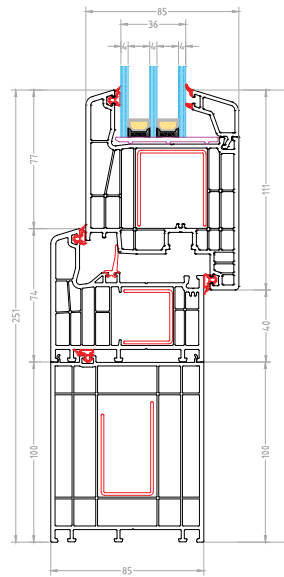


DOOR SYSTEM

Application of 24mm door panel

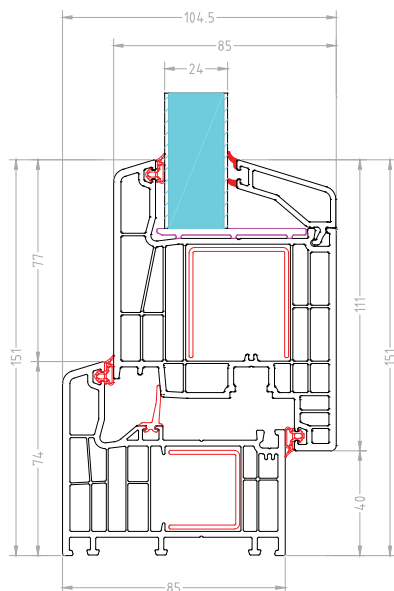


DOOR SYSTEM

Application of 36mm door panel

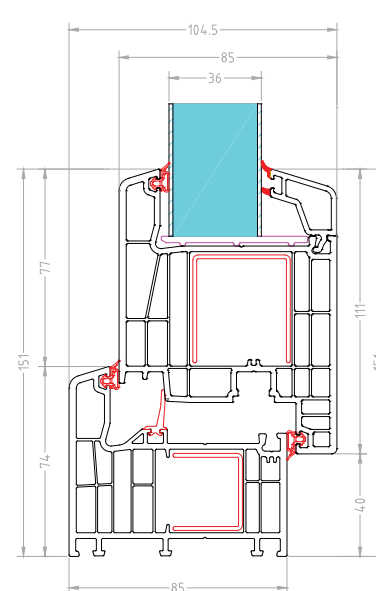


DOOR SYSTEM

Application of door sash, treshold and drainboard

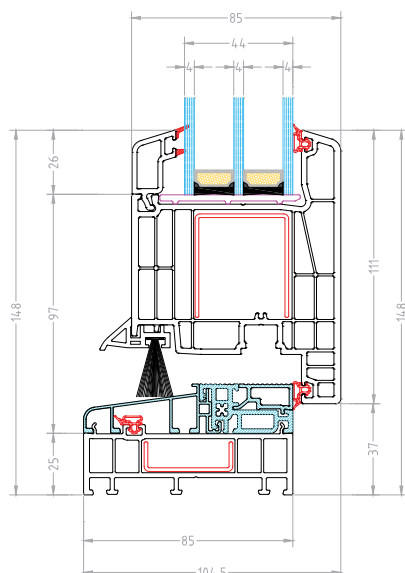


WINDOW SYSTEM


Application of connection molding

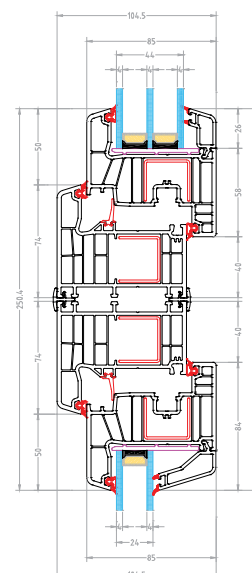

**WINDOW
SYSTEM**
Application
of additional
cornice part
on the wall

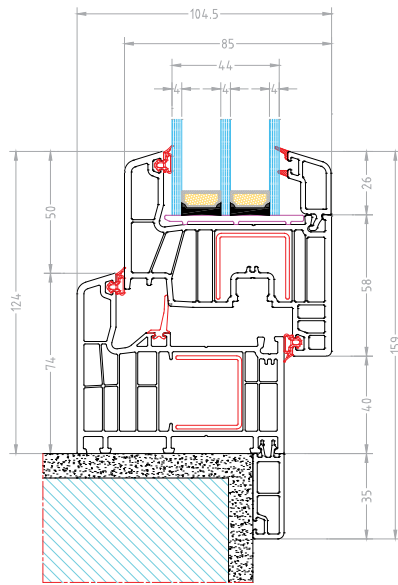

**WINDOW
SYSTEM**
Drainage view

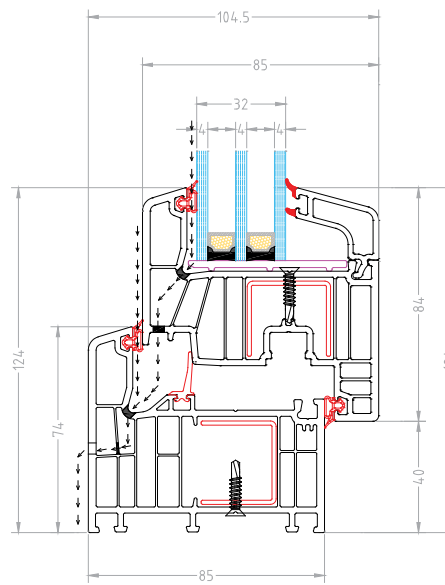

**WINDOW
SYSTEM**
Application
of outside ALU
window sill and
inside PVC window
sill

